

CHARGEURS PCC

FASHION TECHNOLOGIES


LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

SFK3149/20

CONSTRUCTION	Weft inserted
COMPOSITION	85.0 % Recycled polyester 15.0 % Polyester
COATING	Polyamide - 20 mesh
WEIGHT	46.0 gr/m ²
WIDTH	150 cms
COLOURS	Natural , Black , White
DOPE DYED	
COLOR DOT	
APPLICATION	Blouses Pants - Skirts Dresses Reinforcement

WOMENS AND MENS WEAR

CARE INSTRUCTIONS

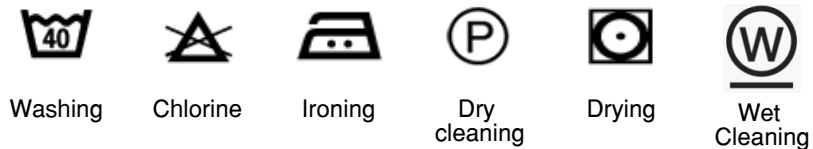

	Fusing Conditions	
 Glueline temperature	121/127°C	121/127°C
	200/400 gr/cm ²	2/4 bar
	12/15 s	12/15 s

In view of the wide variety of existing fabrics and other materials used by the clothing industry, Lainière de Picardie recommends that before industrial use, complete tests are carried out with the fabrics and other materials to be used, and on the machines that will be used. Lainière de Picardie guarantee is, explicitly limited to the replacement of any of its products recognised to be defective, to the exclusion of all other compensation or damages.



AMERICAS · EUROPE · MIDDLE EAST · AFRICA · ASIA PACIFIC

www.chargeurs-pcc.com