

CHARGEURS PCC

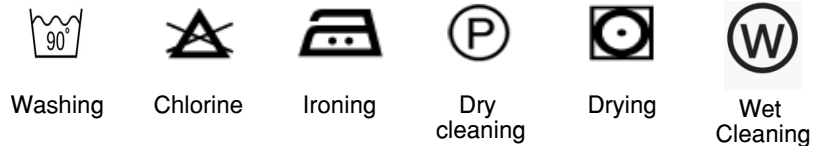
FASHION TECHNOLOGIES






LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

SFK7656/A30

CONSTRUCTION	Weft inserted
COMPOSITION	85.0 % Recycled Polyester 15.0 % Polyester
COATING	Polyamide - 30 mesh
WEIGHT	66.0 gr/m ²
WIDTH	150 cms
COLOURS	Natural , White , Black
DOPE DYED	
COLOR DOT	
APPLICATION	
WOMENS AND MENS WEAR	Reinforcement

CARE INSTRUCTIONS



	Fusing Conditions	
		
 Glueline temperature	143/154°C	143/154°C
	300/400 gr/cm ²	3.0/4.0 bar
	12/15 s	12/15 s

