

CHARGEURS PCC

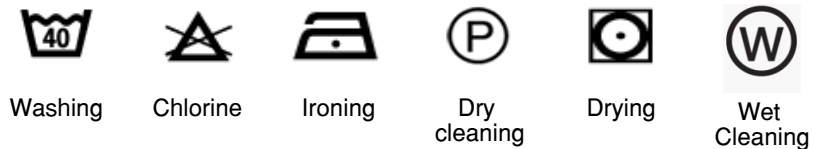
FASHION TECHNOLOGIES






LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

SFK6019/T30

CONSTRUCTION	Weft inserted
COMPOSITION	45.0 % Polyamide 55.0 % Biobased polyamide
COATING	Polyamide - 30 mesh
WEIGHT	24.0 gr/m ²
WIDTH	150 cms
COLOURS	Natural , White , Black With Black Dot (BBD) , Blood Orange , Champagne
DOPE DYED	
COLOR DOT	Black
APPLICATION	
WOMENS AND MENS WEAR	Reinforcement

CARE INSTRUCTIONS



	Fusing Conditions	
		
 Glueline temperature	121/127°C	121/127°C
	200/400 gr/cm ²	2.0/4.0 bar
	null/null s	null/0 s



REDUCED FOSSIL FUEL



REDUCED GHG



REDUCED WATER



REDUCED ENERGY

