

CHARGEURS PCC


FASHION TECHNOLOGIES

LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

SFK6019/23

CONSTRUCTION	Weft inserted
COMPOSITION	45.0 % Polyamide 55.0 % Biobased polyamide
COATING	Polyamide - 23 mesh
WEIGHT	26.0 gr/m ²
WIDTH	150 cms
COLOURS	Natural , White , Black
DOPE DYED	
COLOR DOT	
APPLICATION	
WOMENS AND MENS WEAR	Reinforcement

CARE INSTRUCTIONS

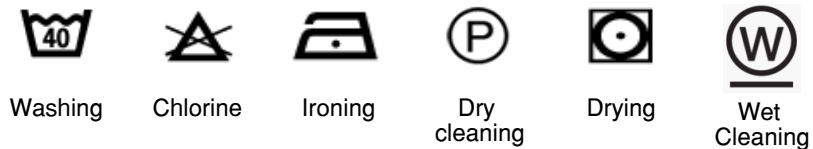

	Fusing Conditions	
 Glueline temperature	121/127°C	121/127°C
	200/400 gr/cm ²	2.0/4.0 bar
	12/15 s	12/15 s



REDUCED FOSSIL FUEL



REDUCED GHG



REDUCED WATER



REDUCED ENERGY



Class 1



Class 2



AMERICAS · EUROPE · MIDDLE EAST · AFRICA · ASIA PACIFIC

www.chargeurs-pcc.com